

STERALUX®

THE BEST MADE LIGHTING.

SteraLux LINEAR


AN ENERGY EFFICIENT LED LIGHT FOR DIFFERENT LOCATIONS

SteraLux's SLIM LED lights are an energy efficient and environmentally friendly solution for indoor lighting. They are a perfect fit for, for example, storages and industrial locations. SteraLux's LINEAR LED-lights are easy to install and they have a long life span.

We customise the lighting according to your needs. You can modify features like beam angle, control systems, colour temperature, and mounting method. We provide lighting as a total solution, as we also offer design and installation services. We can also recycle your old lighting devices.

USAGE: FACTORIES, STORAGES, OFFICES, SHOPPING CENTRES, SPORT CENTRES, SCHOOLS, HOSPITALS, SHOPS

SteraLux's SLIM LED lights are an energy efficient and environmentally friendly solution for storages and industrial locations. They are easy to install and they have a long life span.

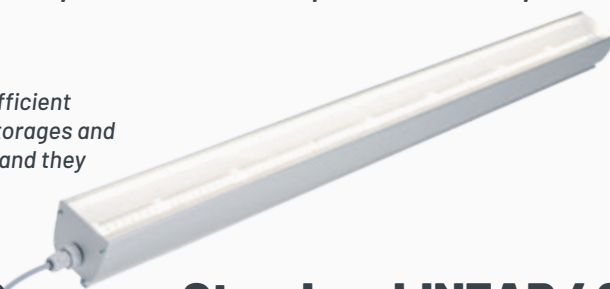

SteraLux LINEAR 20

PRODUCT INFORMATION

Power:	20 W*)
Luminous flux:	2 600 lm*)
Installation height:	> 3 m
Electrical number:	4310900
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 200 mm
Width:	81 mm
Height:	75 mm
Weight:	3,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-20 °C - +50 °C (D-class)
Beam angle:	55°/120°

Frame material: aluminium

*)Power and luminous flux +/- 10 %

SteraLux LINEAR 40

PRODUCT INFORMATION

Power:	35 W*)
Luminous flux:	4 100 lm*)
Installation height:	2,5-4 m
Electrical number:	4310901
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 200 mm
Width:	81 mm
Height:	75 mm
Weight:	3,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-20 °C - +50 °C (D-class)
Beam angle:	55°/120°

Frame material: aluminium

*)Power and luminous flux +/- 10 %

SteraLux LINEAR 70

PRODUCT INFORMATION

Power:	70 W ^{*)}
Luminous flux:	8100 lm ^{*)}
Installation height:	5–7 m
Electrical number:	4310902
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 200 mm
Width:	81 mm
Height:	75 mm
Weight:	3,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-20 °C – +50 °C (D-class)
Beam angle:	55°/120°

Frame material: aluminium

^{*)}Power and luminous flux +/- 10 %

SteraLux LINEAR 100

PRODUCT INFORMATION

Power:	100 W ^{*)}
Luminous flux:	12 500 lm ^{*)}
Installation height:	7–10 m
Electrical number:	4310903
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 575 mm
Width:	81 mm
Height:	75 mm
Weight:	4,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-40 °C – +50 °C (D-class)
Beam angle:	55°/120°

Frame material: aluminium

^{*)}Power and luminous flux +/- 10 %

SteraLux LINEAR 150

PRODUCT INFORMATION

Power:	150 W ^{*)}
Luminous flux:	16 500 lm ^{*)}
Installation height:	> 10 m
Electrical number:	4310904
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 575 mm
Width:	81 mm
Height:	75 mm
Weight:	4,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-40 °C – +50 °C (D-class)
Beam angle:	55°/120°

Frame material: aluminium

^{*)}Power and luminous flux +/- 10 %

SteraLux LINEAR POWER

PRODUCT INFORMATION

Power:	150 W ^{*)}
Luminous flux:	26 100 lm ^{*)}
Installation height:	> 10 m
Electrical number:	4310907
Color temperature:	4 000/5 000 kelvin
Installation:	hang, rail, ceiling
Length:	1 575 mm
Width:	81 mm
Height:	75 mm
Weight:	4,5 kg
Frame color options:	aluminium, RAL colors
Diffuser:	bright, opal, microprisma
CRI (color rendering):	> 80
Lighting control:	on/off and DALI
Operating hours:	> 50 000 h
Guarantee:	5 y
STUL guarantee:	2 y
Country of origin:	Finland
Luminary:	LED
Protection class:	Class I
IP class:	IP54
Operating temperature:	-40 °C – +40 °C
Beam angle:	55°/120°

Frame material: aluminium

^{*)}Power and luminous flux +/- 10 %